


B200016

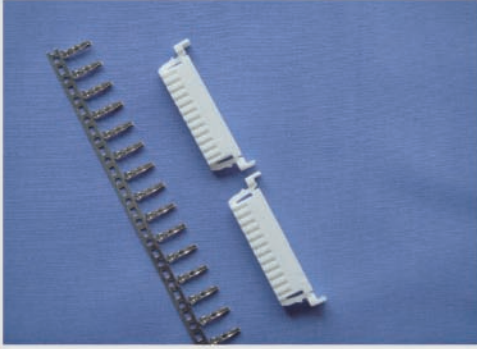

► 主要技术特性 (Main Specifications)

- 适用导线规格 (Applicable wire) : AWG30#~24#
- 适用基板厚度 (Applicable PC board thickness) : 0.8mm~1.6mm
- 温度范围 (Temperature range) : -25°C~+85°C
- 额定电压 (Voltage rating) : 250V AC, DC
- 额定电流 (Current rating) : 2A AC, DC
- 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstanding voltage) : 500V AC/minute

材料及电镀规格 Material and Finish


型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	锡青铜 Phosphor bronze	0.2mm	镀锡 Tin-plated

产品尺寸图 Product size chart

 单位: mm 一般公差: ± 0.20


TERMINAL

B200016-4 FT2009-14

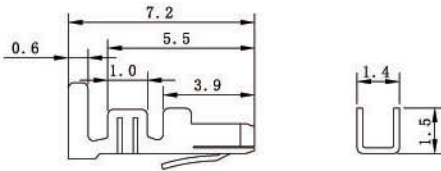

HOUSING

B200016-2

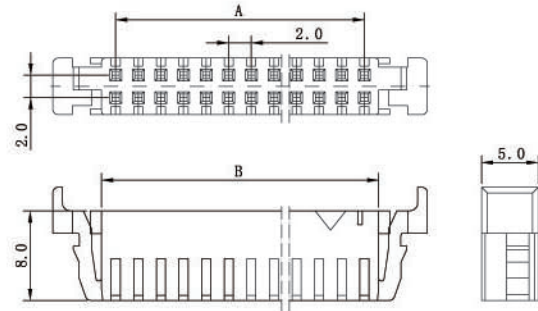

HOUSING

极数 Circuits	型号 Type	尺寸 (Dimensions) mm		备注型号 P. S. Type
		A	B	
12	B200016-2-12	10.0	12.6	FH20020-12
14	B200016-2-14	12.0	14.6	FH20020-14
16	B200016-2-16	14.0	16.6	FH20020-16
18	B200016-2-18	16.0	18.6	FH20020-18
20	B200016-2-20	18.0	20.6	FH20020-20
22	B200016-2-22	20.0	22.6	FH20020-22
24	B200016-2-24	22.0	24.6	FH20020-24
26	B200016-2-26	24.0	26.6	FH20020-26
28	B200016-2-28	26.0	28.6	FH20020-28