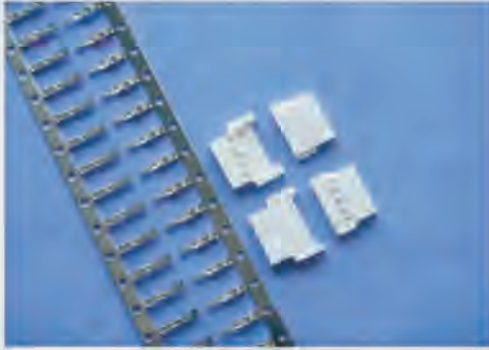


# B200019



### ▶ 主要技术特性 (Main Specifications)

- ▶ 适用导线规格 (Applicable wire) : AWG32#~26#
- ▶ 适用基板厚度 (Applicable PC board thickness) : 0.8mm~1.6mm
- ▶ 温度范围 (Temperature range) : -25°C~+85°C
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 2A AC, DC
- ▶ 接触电阻 (Contact resistance) :  $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) :  $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 800V AC/minute



### 材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	锡青铜 Phosphor bronze	0.2mm	镀锡 Tin-plated

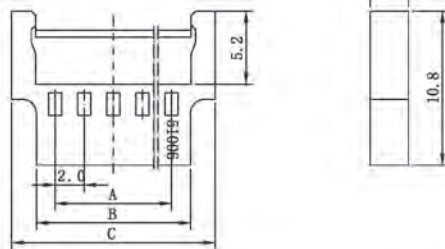
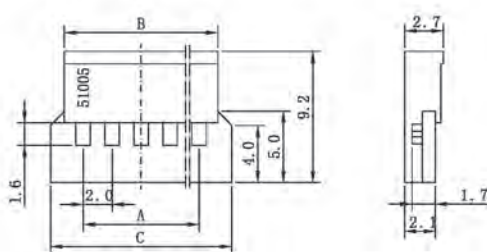
### 产品尺寸图 Product size chart

 单位: mm 一般公差:  $\pm 0.20$ 

### TERMINAL

**B200019-3**    **50012**

**B200019-4**    **50013**


### HOUSING

**B200019-1**

**B200019-2**


### HOUSING

极数 Circuits	型号 Type	尺寸 (Dimensions) mm			备注型号 P. S. Type
		A	B	C	
2	B200019-1-02	2.0	4.6	8.0	51006B-02A
3	B200019-1-03	4.0	6.6	10.0	51006B-03A
4	B200019-1-04	6.0	8.6	12.0	51006B-04A
5	B200019-1-05	8.0	10.6	14.0	51006B-05A
6	B200019-1-06	10.0	12.6	16.0	51006B-06A
7	B200019-1-07	12.0	14.6	18.0	51006B-07A
8	B200019-1-08	14.0	16.6	20.0	51006B-08A
9	B200019-1-09	16.0	18.6	22.0	51006B-09A
10	B200019-1-10	18.0	20.6	24.0	51006B-10A

**B200019**

## HOUSING

极数 Circuits	型号 Type	尺寸(Dimensions)mm			备注型号 P. S. Type
		A	B	C	
2	B200019-2-02	2.0	4.6	6.6	51005B-02Y
3	B200019-2-03	4.0	6.6	8.6	51005B-03Y
4	B200019-2-04	6.0	8.6	10.6	51005B-04Y
5	B200019-2-05	8.0	10.6	12.6	51005B-05Y
6	B200019-2-06	10.0	12.6	14.6	51005B-06Y
7	B200019-2-07	12.0	14.6	16.6	51005B-07Y
8	B200019-2-08	14.0	16.6	18.6	51005B-08Y
9	B200019-2-09	16.0	18.6	20.6	51005B-09Y
10	B200019-2-10	18.0	20.6	22.6	51005B-10Y